cmc NORTH AMERICA

60HD+



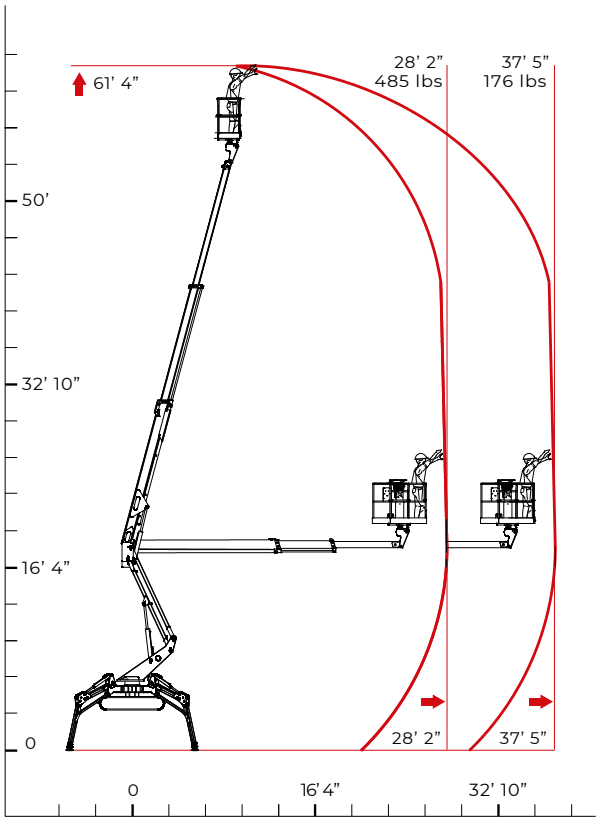
TECHNICAL SHEET

PERFORMANCE AND DIMENSIONS

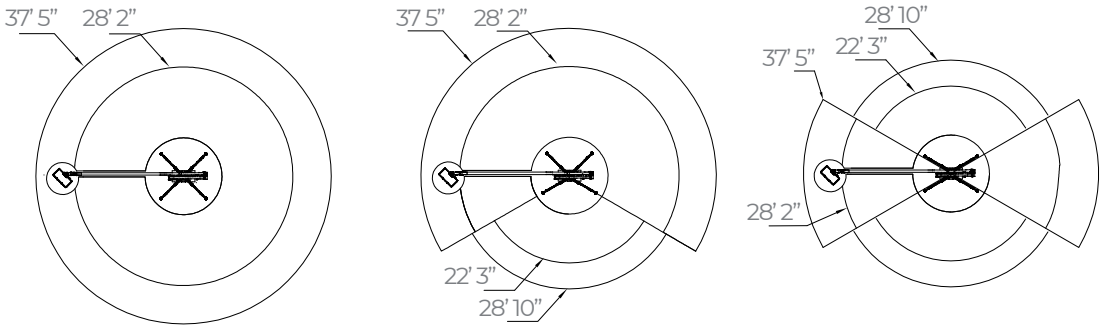
Main features

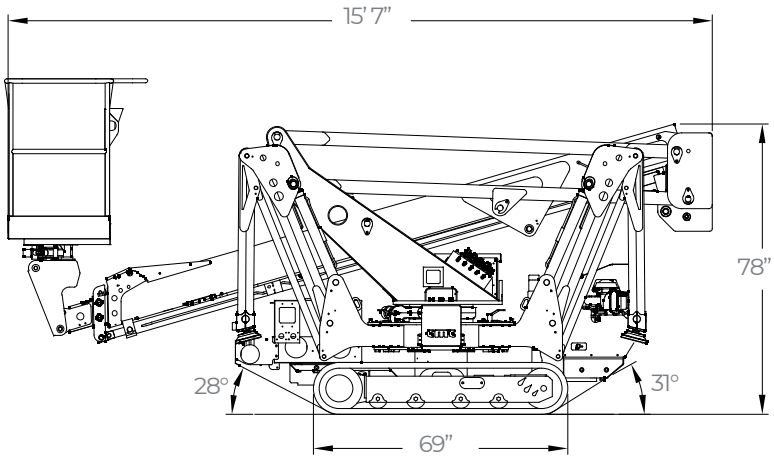
This articulated platform with pantograph and telescopic boom offers outstanding performance thanks to its outriggers of high leveling capacity. Designed for maximum work performance on the toughest terrain, it's an excellent alternative to a truck-mounted platform.

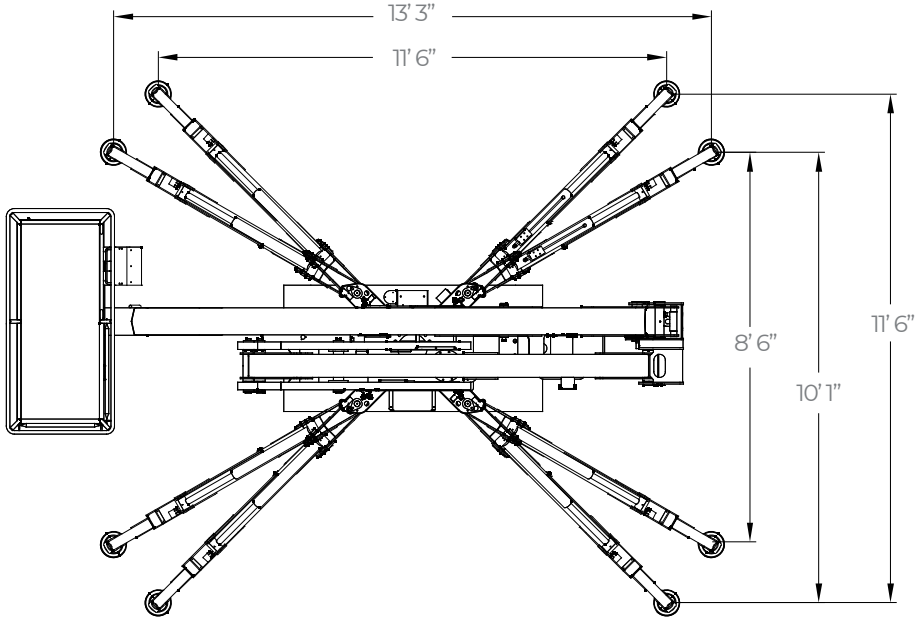
Max. working height	**61' 4"**
Max. reach with 80 kg	**37' 5"**
Platform height	**54' 9"**
Max. load in basket	**485 lbs**
Basket dimensions	**55" x 27" x 43"**
Basket rotation	**+90°/-87° (optional)**
Turret rotation	**+/- 355° (710° continuous)**
Total weight	**5,919 lbs**

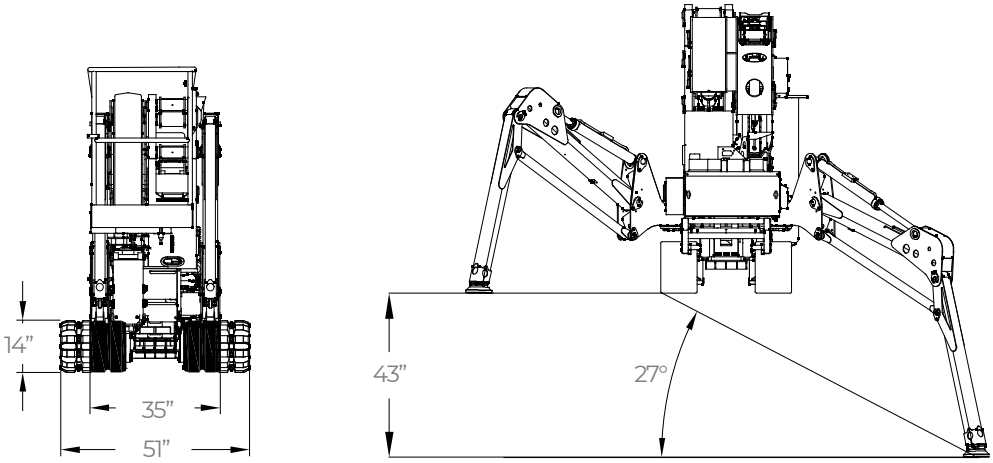


**Technical data sheets have been converted from metric measurements to U.S. customary units (feet and inches) to provide the most accurate specifications for the U.S. market. All specifications are subject to change and are non-binding. Always refer to the official operator's manual for the exact and most up-to-date technical data.*


37' 5"
28' 2"
37' 5"
28' 2"
22' 3"
28' 10"
28' 10"
22' 3"
37' 5"
28' 2"


15' 7"
78"
28°
31°
69"


13' 3"
11' 6"
8' 6"
10' 1"
11' 6"


14"
35"
51"
43"
27°